SIEMENS

Data sheet 3RW5536-6HA16



SIRIUS soft starter 200-690 V 171 A, 110-250 V AC Screw terminals

product brand name	SIRIUS
product category	Hybrid switching devices
product designation	Soft starter
product type designation	3RW55
manufacturer's article number	
 of high feature HMI module usable 	3RW5980-0HF00
 of communication module PROFINET standard usable 	3RW5980-0CS00
 of communication module PROFINET high-feature usable 	3RW5950-0CH00
 of communication module PROFIBUS usable 	3RW5980-0CP00
 of communication module Modbus TCP usable 	3RW5980-0CT00
 of communication module Modbus RTU usable 	3RW5980-0CR00
 of communication module Ethernet/IP 	3RW5980-0CE00
 of circuit breaker usable at 400 V 	3VA2325-7MN32-0AA0; Type of coordination 1, Iq = 30 kA, CLASS 10
 of circuit breaker usable at 500 V 	3VA2325-7MN32-0AA0; Type of coordination 1, Iq = 10 kA, CLASS 10
 of circuit breaker usable at 400 V at inside-delta circuit 	3VA2440-7MN32-0AA0; Type of coordination 1, Iq = 30 kA, CLASS 10
 of circuit breaker usable at 500 V at inside-delta circuit 	3VA2440-7MN32-0AA0; Type of coordination 1, Iq = 10 kA, CLASS 10
 of the gG fuse usable up to 690 V 	3NA3365-6; Type of coordination 1, Iq = 65 kA
 of the gG fuse usable at inside-delta circuit up to 500 V 	3NA3365-6; Type of coordination 1, Iq = 65 kA
 of full range R fuse link for semiconductor protection usable up to 690 V 	3NE1230-0; Type of coordination 2, Iq = 65 kA
 of back-up R fuse link for semiconductor protection usable up to 690 V 	3NE3334-0B; Type of coordination 2, Iq = 65 kA

General technical data	
starting voltage [%]	20 100 %
stopping voltage [%]	50 50 %
start-up ramp time of soft starter	0 360 s
ramp-down time of soft starter	0 360 s
start torque [%]	10 100 %
stopping torque [%]	10 100 %
torque limitation [%]	20 200 %
current limiting value [%] adjustable	125 800 %
breakaway voltage [%] adjustable	40 100 %
breakaway time adjustable	0 2 s
number of parameter sets	3

	F 0/
accuracy class acc. to IEC 61557-12	5 %
certificate of suitability	W
CE marking	Yes
UL approval	Yes
CSA approval	Yes
product component	
HMI-High Feature	Yes
is supported HMI-High Feature	Yes
product feature integrated bypass contact system	Yes
number of controlled phases	3
trip class	CLASS 10A / 10E (default) / 20E / 30E; acc. to IEC 60947-4-2
current unbalance limiting value [%]	10 60 %
ground-fault monitoring limiting value [%]	10 95 %
recovery time after overload trip adjustable	60 1 800 s
buffering time in the event of power failure	
 for main current circuit 	100 ms
 for control circuit 	100 ms
idle time adjustable	0 255 s
insulation voltage rated value	690 V
degree of pollution	3, acc. to IEC 60947-4-2
impulse voltage rated value	8 kV
blocking voltage of the thyristor maximum	1 800 V
service factor	1.15
surge voltage resistance rated value	8 kV
maximum permissible voltage for safe isolation	
between main and auxiliary circuit	690 V; does not apply for thermistor connection
utilization category acc. to IEC 60947-4-2	AC 53a
shock resistance	15 g / 11 ms, from 6 g / 11 ms with potential contact lifting
vibration resistance	15 mm up to 6 Hz; 2 g up to 500 Hz
reference code acc. to IEC 81346-2	Q
reserving doug and, IU IEU 0 1340°Z	
Substance Prohibitance (Date) product function	15.02.2018 00:00:00
Substance Prohibitance (Date) product function	
Substance Prohibitance (Date) product function • ramp-up (soft starting)	15.02.2018 00:00:00
Substance Prohibitance (Date) product function • ramp-up (soft starting) • ramp-down (soft stop)	15.02.2018 00:00:00 Yes
Substance Prohibitance (Date) product function • ramp-up (soft starting) • ramp-down (soft stop) • breakaway pulse	15.02.2018 00:00:00 Yes Yes
Substance Prohibitance (Date) product function • ramp-up (soft starting) • ramp-down (soft stop) • breakaway pulse • adjustable current limitation	15.02.2018 00:00:00 Yes Yes Yes
Substance Prohibitance (Date) product function • ramp-up (soft starting) • ramp-down (soft stop) • breakaway pulse • adjustable current limitation • creep speed in both directions of rotation	15.02.2018 00:00:00 Yes Yes Yes Yes Yes
Substance Prohibitance (Date) product function • ramp-up (soft starting) • ramp-down (soft stop) • breakaway pulse • adjustable current limitation • creep speed in both directions of rotation • pump ramp down	15.02.2018 00:00:00 Yes Yes Yes Yes Yes Yes
Substance Prohibitance (Date) product function • ramp-up (soft starting) • ramp-down (soft stop) • breakaway pulse • adjustable current limitation • creep speed in both directions of rotation • pump ramp down • DC braking	15.02.2018 00:00:00 Yes Yes Yes Yes Yes Yes Yes
Substance Prohibitance (Date) product function • ramp-up (soft starting) • ramp-down (soft stop) • breakaway pulse • adjustable current limitation • creep speed in both directions of rotation • pump ramp down • DC braking • motor heating	15.02.2018 00:00:00 Yes Yes Yes Yes Yes Yes Yes Yes Yes
Substance Prohibitance (Date) product function	15.02.2018 00:00:00 Yes Yes Yes Yes Yes Yes Yes Yes Yes Ye
Substance Prohibitance (Date) product function • ramp-up (soft starting) • ramp-down (soft stop) • breakaway pulse • adjustable current limitation • creep speed in both directions of rotation • pump ramp down • DC braking • motor heating • slave pointer function • trace function	15.02.2018 00:00:00 Yes Yes Yes Yes Yes Yes Yes Yes Yes Ye
Substance Prohibitance (Date) product function ramp-up (soft starting) ramp-down (soft stop) breakaway pulse adjustable current limitation creep speed in both directions of rotation pump ramp down DC braking motor heating slave pointer function trace function intrinsic device protection	15.02.2018 00:00:00 Yes Yes Yes Yes Yes Yes Yes Yes Yes Ye
Substance Prohibitance (Date) product function	15.02.2018 00:00:00 Yes Yes Yes Yes Yes Yes Yes Yes Yes Ye
Substance Prohibitance (Date) product function • ramp-up (soft starting) • ramp-down (soft stop) • breakaway pulse • adjustable current limitation • creep speed in both directions of rotation • pump ramp down • DC braking • motor heating • slave pointer function • trace function • intrinsic device protection	Yes
Substance Prohibitance (Date) product function	Yes
Substance Prohibitance (Date) product function	Yes
Substance Prohibitance (Date) product function	Yes
Substance Prohibitance (Date) product function	Yes
Substance Prohibitance (Date) product function	Yes
Substance Prohibitance (Date) product function	Yes
Substance Prohibitance (Date) product function	Yes
Substance Prohibitance (Date) product function	Yes
Substance Prohibitance (Date) product function	Yes
Substance Prohibitance (Date) product function	Yes
Substance Prohibitance (Date) product function	Yes
Substance Prohibitance (Date) product function • ramp-up (soft starting) • ramp-down (soft stop) • breakaway pulse • adjustable current limitation • creep speed in both directions of rotation • pump ramp down • DC braking • motor heating • slave pointer function • trace function • intrinsic device protection • motor overload protection • evaluation of thermistor motor protection • inside-delta circuit • auto-RESET • manual RESET • remote reset • communication function • operating measured value display • event list • error logbook • via software parameterizable • via software configurable • screw terminal	Yes
Substance Prohibitance (Date) product function	Yes

• Immware update • removable terminal for control circuit • vollage ramp • torque control • combined braking • analog output • incondition monitoring • analog output • condition monitoring • analog output • condition monitoring • application wizands • application wizands • application wizands • application wizands • allerinative run-down • emergency operation mode • reversing operation • and of Cated value • at 40° C rated value • at 40° C rated value • at 60° C rated value • at 80° V rated value • at 80° V rated value • at 80° C rated value • at 80° V rated value • at 80° C rated value • at 80° V rated value •		Feature communication modules
• vortage ramp • votage ramp • votage control • votage control • combined braking • votage control • combined braking • analog output • programmable control inputs/outputs • condition monitoring • automatic parameterisation • automatic parameterisation • automatic parameterisation • automatic parameterisation • application wizards • alternative run-down • alternative run-down • emergency operation mode • ves • emergency operation mode • ves • servicing operation • soft starting at heavy starting conditions **Power* Encorronics **Operational current • all 40 ° Crated value • all 40 ° Crated value • all 40 ° Crated value • all 50 ° Crated value • all thindide-delta circuit rated value • all thindide-delta circuit all 40 ° Crated value • all sold value for the operating voltage at inside-delta circuit all 40 ° Crated value • all 50 ° Crater value •	• firmware undate	
• voltage ramp • forque control • controlled braking • analog output • responsible control inputs/outputs • condition monitoring • condition monitoring • condition monitoring • personal parameterisation • application wizards • all master foundown • consigency operation mode • reversing operation • and 40 °C rated value • at 40 °C rated value • at 60 °C rated value • at	•	
enorpiend braking enorpiend braking enorpiend braking enorpiend more injust-fourputs enorpiend injust-fourputs enorpien		
• combined braking • mariag output • programmable control inputs/outputs • programmable control inputs/outputs • condition monitoring • automatic parameterisation • application wizards • application wizards • application wizards • application wizards • all member for any of the motor protection • energency operation mode • reversing operation mode • reversing operation mode • reversing operation wizards • of the first study of the motor protection • all 40 °C rated value • all 40 °C rated value • all 40 °C rated value • all 60 °C r		
e analog output programmable control inputs/outputs programmable control inputs/outputs condition monitoring automatic parameterisation substance of the programmable control inputs/outputs automatic parameterisation paghication wizards alternative run-down emergency operation mode reversing operation yes obt starting at heavy starting conditions Power Electronics Operational current at 40°C rated value at 40°C rated value at 60°C rated value at 60°C rated value at 60°C rated value at 60°C rated value coperating voltage at 60°C rated value at 60°C	•	
e programmable control inputs/outputs condition monitoring automatic parameterisation programmable control inputs/outputs e all programmable control inputs/outputs e reversing operation soft sarting at heavy starting conditions prover Electronics Operational current e at 40 °C rated value		
condition monitoring automatic parameterisation spiciation vizards stemative run-down semegropy operation mode seversing operation solves stating at heavy starting conditions systematic and the starting at		
equitomatic parameterisation spipication wizards elementary brun-down emergency operation mode erversing operation soft starting at heavy starting conditions Power Electronics Operational current elementary of trade value el		
alternative run down alternative tolerance of the operating voltage at inside-delta circuit relative positive tolerance of the operating voltage at inside-delta circuit and over for at all 400 V at 140 V crated value all 400 V crated value ball and 00 V crated value all 400 V crated value ball and 00 V crated value all 400 V crated value ball and 00 V crated value call and 00 V crated value ball and 00 V at 160 V crated value ball and 00	3	Yes
emergency operation mode evereshing operation est of starting at heavy starting conditions Power Electronics operational current el 40 °C rated value el 40 °C rated value minimum el 40 °C rated value eminimum el 40 °C rated value el	·	Yes
• reversing operation • soft starting at heavy starting conditions Power Electronics operational current • at 40 °C rated value • at 60 °C cater startup • at 60 °C during startup	alternative run-down	Yes
Soft starting at heavy starting conditions Power Electronics Operational current at 40 °C rated value at 40 °C rated value 153 A at 60 °C rated value 153 A at 60 °C rated value 154 OFC rated value 265 A at 60 °C rated value 265 A at 60 °C rated value 265 A at 60 °C rated value 274 A 286 A 286 A 286 A 286 A 286 A 287 OFC rated value 286 A 287 OFC rated value 286 A 287 OFC rated value 288 A 289 OFC rated value 290 690 V 288 OFC rated value 200 690 V 2	 emergency operation mode 	Yes
porational current at 40 °C rated value minimum at 50 °C rated value minimum at 50 °C rated value minimum at 50 °C rated value at 60 °C rated value at minide-delta circuit rated value at minide-delta circuit rated value relative positive tolerance of the operating voltage relative positive tolerance of the operating voltage at minide-delta circuit relative positive tolerance of the operating voltage at minide-delta circuit relative positive tolerance of the operating voltage at minide-delta circuit relative positive tolerance of the operating voltage at minide-delta circuit relative positive tolerance of the operating voltage at minide-delta circuit relative positive tolerance of the operating voltage at at 300 v at 40 °C rated value at 400 v at 40 °C rated value at 400 v at 10 °C rated value at 400 v at 10 °C rated value at 500 v at 40 °C rated value at 500 v at 10 °C rated value be at 600 v at 500	reversing operation	Yes
operational current at 40 °C rated value minimum at 50 °C rated value minimum at 50 °C rated value minimum at 50 °C rated value operational current at inside-defta circuit at 40 °C rated value 296 A at 60 °C rated value 296 A at 60 °C rated value 296 A at 60 °C rated value 296 A 244 A operating voltage a rated value 200 690 V 2		Yes
at 40 °C rated value inimum at 50 °C rated value at 60 °C rated value porational current at inside-delta circuit at 60 °C rated value 296 A at 60 °C rated value 296 A 265 A 265 A 264 A 265 A 265 A 264 A 265 A 265 A 264 A 265 A 265 A 265 A 265 A 265 A 266 A 266 A 267 Crated value 200 690 V 201 A 200	Power Electronics	
at 40 °C rated value at 50 °C rated value at 60 °C rated value poperational current at inside-delta circuit at 40 °C rated value at 50 °C rated value 296 A at 50 °C rated value 286 A at 60 °C rated value 286 A at 60 °C rated value 200 690 V at inside-delta circuit rated value at inside-delta circuit rated value at inside-delta circuit rated value 200 690 V relative negative tolerance of the operating voltage relative positive tolerance of the operating voltage at inside-delta circuit relative positive tolerance of the operating voltage at inside-delta circuit relative positive tolerance of the operating voltage at inside-delta circuit relative positive tolerance of the operating voltage at inside-delta circuit relative positive tolerance of the operating voltage at inside-delta circuit relative positive tolerance of the operating voltage at inside-delta circuit relative positive tolerance of the operating voltage at inside-delta circuit relative positive tolerance of the operating voltage at inside-delta circuit at 40 °C rated value at 230 V at 140 °C rated value at 400 V at 16 side-delta circuit at 40 °C rated value at 500 V at 40 °C rated value at 500 V at 40 °C rated value Operating frequency 1 rated value Poperating frequency 2 rated value relative negative tolerance of the operating frequency relative positive tolerance of the operating frequency at 50 °C after startup at 50 °C after startup at 60 °C after startup at 60 °C after startup at 60 °C adming startup at 60 °C during st	operational current	
at 50 °C rated value at 60 °C rated value at 60 °C rated value at 40 °C rated value at 50 °C rated value at 60 °C rated value at 60 °C rated value 265 A 244 A poperating voltage arted value at inside-delta circuit rated value relative positive tolerance of the operating voltage relative positive tolerance of the operating voltage at inside-delta circuit relative positive tolerance of the operating voltage at inside-delta circuit relative positive tolerance of the operating voltage at inside-delta circuit relative positive tolerance of the operating voltage at inside-delta circuit relative positive tolerance of the operating voltage at inside-delta circuit relative positive tolerance of the operating voltage at inside-delta circuit relative positive tolerance of the operating voltage at inside-delta circuit relative positive tolerance of the operating voltage at inside-delta circuit relative positive tolerance of the operating voltage at inside-delta circuit at 40 °C rated value at 230 V at 40 °C rated value at 400 V at 40 °C rated value at 400 V at 160 °C rated value at 500 V at inside-delta circuit at 40 °C rated value at 500 V at inside-delta circuit at 40 °C rated value at 500 V at 40 °C rated value at 500 V at 40 °C rated value be at 600 V at 40 °C rated value Operating frequency 1 rated value Operating frequency 2 rated value Operating frequency 2 rated value To 80 Hz Operating frequency 2 rated value Operating frequency 3 rated value Operating frequency 4 rated value To 80 Hz Operating frequency 6 rated value Operating frequency 6 rated value Operating frequency 7 rated value Operating frequency 8 rated value Operating frequency 9 rated value Operating frequency 1 rated value of the current at AC at 40 °C after startup To 80 °C after startup Operating frequency 1 rated value of the current at AC at 40 °C after startup To 80 °C after	 at 40 °C rated value 	171 A
e at 60 °C rated value operational current at inside-delta circuit e at 40 °C rated value e at 50 °C rated value e at 60 °C rated value e at 10 °C rated value e at 200 690 V e at 10 °C rated value 10 % relative positive tolerance of the operating voltage at inside-delta circuit relative positive tolerance of the operating voltage at inside-delta circuit operating power for 3-phase motors e at 230 V at 10 °C rated value e at 400 V at 10 °C rated value e at 400 V at 10 °C rated value e at 400 V at 10 °C rated value e at 500 V at 10 °C rated value e at 500 V at inside-delta circuit at 40 °C rated value e at 500 V at 10 °C rated value e at 500 V at 10 °C rated value e at 500 V at 10 °C rated value e at 500 V at 10 °C rated value folk W operating frequency 1 rated value Operating frequency 2 rated value operating frequency 2 rated value folk W operating frequency 2 rated value operating frequency 2 rated value operating frequency 2 rated value folk W operating frequency 2 rated value operating frequency 2 rated value operating frequency 2 rated value folk W operating frequency 3 rated value of the operating frequency minimum load [%] power loss [W] for rated value of the current at AC at 40 °C after startup at 50 °C after startup 40 W at 60 °C during startup at 60 °C durin	 at 40 °C rated value minimum 	
operational current at inside-delta circuit at 40 °C rated value at 60 °C rated value 255 A 244 A operating voltage relative negative tolerance of the operating voltage relative positive tolerance of the operating voltage at inside-delta circuit relative positive tolerance of the operating voltage at inside-delta circuit relative positive tolerance of the operating voltage at inside-delta circuit relative positive tolerance of the operating voltage at inside-delta circuit operating power for 3-phase motors at 230 V at 40 °C rated value at 230 V at 100 °C rated value at 400 V at 40 °C rated value at 400 V at 100 °C rated value at 500 V at 40 °C rated value at 600 V at 40 °C rated value at 600 V at 40 °C rated value at 500 V at 60 °C rated value at 600 V at 60 °C rated value at 600 V at 60 °C rated value at 600 V at 60 °C after startup at 60 °C after startup at 60 °C after startup at 60 °C during startup type of voltage of the control supply voltage according to the control supply voltage according to the control supply voltage according to the control supply voltage at 60 °C otolage of the control supply voltage according to the control supply volta	 at 50 °C rated value 	153 A
at 40 °C rated value at 60 °C rated value 265 A 244 A operating voltage at at or or cated value 200 690 V relative negative tolerance of the operating voltage relative negative tolerance of the operating voltage relative positive tolerance of the operating voltage at inside-delta circuit operating power for 3-phase motors at 230 V at 40 °C rated value at 230 V at 1 niside-delta circuit at 40 °C rated value at 400 V at inside-delta circuit at 40 °C rated value at 400 V at 40 °C rated value at 500 V at 40 °C rated value at 500 V at 1 or Cated value at 690 V at 40 °C rated value at 690 V at 40 °C rated value at 690 V at 40 °C rated value Operating frequency 1 rated value Operating frequency 2 rated value of the operating frequency 2 rated value at 40 °C after startup at 40 °C after startup at 40 °C after startup at 60 °C during startup at 60 °C dur	at 60 °C rated value	141 A
• at 50 °C rated value • at 60 °C rated value • at inside-delta circuit rated value • at inside-delta circuit rated value relative negative tolerance of the operating voltage relative positive tolerance of the operating voltage at inside-delta circuit relative positive tolerance of the operating voltage at inside-delta circuit relative positive tolerance of the operating voltage at inside-delta circuit relative positive tolerance of the operating voltage at inside-delta circuit relative positive tolerance of the operating voltage at inside-delta circuit relative positive tolerance of the operating voltage at inside-delta circuit relative positive tolerance of the operating voltage at inside-delta circuit at 40 °C rated value • at 230 V at 40 °C rated value • at 400 V at 40 °C rated value • at 400 V at 1 inside-delta circuit at 40 °C rated value • at 500 V at 40 °C rated value • at 690 V at 40 °C rated value • at 690 V at 40 °C rated value • at 690 V at 100 °C rated value • at 690 V at 60 °C rated value Operating frequency 1 rated value Operating frequency 2 rated value Felative negative tolerance of the operating frequency relative positive tolerance of the operating frequency relative positive tolerance of the operating frequency at 40 °C after startup • at 50 °C after startup • at 60 °C during s	•	
e at 60 °C rated value operating voltage		
operating voltage		
* rated value * at inside-delta circuit rated value * at inside-delta circuit rated value * at inside-delta circuit relative negative tolerance of the operating voltage relative negative tolerance of the operating voltage at inside-delta circuit relative positive tolerance of the operating voltage at inside-delta circuit relative positive tolerance of the operating voltage at inside-delta circuit operating power for 3-phase motors * at 230 V at 40 °C rated value * at 230 V at 40 °C rated value * at 400 V at 40 °C rated value * at 400 V at 40 °C rated value * at 550 V at 40 °C rated value * at 550 V at 40 °C rated value * at 550 V at 40 °C rated value * at 690 V at 40 °C rated value * at 690 V at 40 °C rated value * at 690 V at 40 °C rated value * at 690 V at 40 °C rated value * at 690 V at 40 °C rated value * at 690 V at 40 °C rated value * at 690 V at 40 °C rated value * at 690 V at 40 °C rated value * at 690 V at 40 °C rated value * at 690 V at 40 °C rated value * at 690 V at 40 °C rated value * at 690 V at 40 °C rated value * at 690 V at 40 °C rated value * at 690 V at 40 °C rated value * at 690 V at 40 °C rated value * at 690 V at 40 °C rated value * at 690 V at 40 °C rated value * at 690 V at 40 °C rated value * at 40 °C dater startup * at 60 °C after startup * at 60 °C after startup * at 60 °C after startup * at 60 °C during startup * at		244 A
e at inside-delta circuit rated value relative negative tolerance of the operating voltage relative positive tolerance of the operating voltage at inside-delta circuit relative positive tolerance of the operating voltage at inside-delta circuit relative positive tolerance of the operating voltage at inside-delta circuit operating power for 3-phase motors • at 230 V at 40 °C rated value • at 230 V at 40 °C rated value • at 400 V at inside-delta circuit at 40 °C rated value • at 400 V at 40 °C rated value • at 500 V at 40 °C rated value • at 500 V at 40 °C rated value • at 500 V at 40 °C rated value • at 500 V at 40 °C rated value • at 690 V at 40 °C rated value • at 690 V at 40 °C rated value • at 690 V at 40 °C rated value Poperating frequency 1 rated value Poperating frequency 1 rated value Poperating frequency 1 rated value Poperating frequency 2 rated value relative negative tolerance of the operating frequency relative positive tolerance of the operating frequency minimum load [%] power loss [W] for rated value of the current at AC • at 40 °C after startup • at 50 °C after startup • at 60 °C after startup • at 60 °C after startup at 60 °C after startup 46 W at 40 °C during startup 42 W power loss [W] at AC at current limitation 350 % • at 40 °C during startup • at 60 °C during		
relative negative tolerance of the operating voltage relative positive tolerance of the operating voltage at inside-delta circuit relative positive tolerance of the operating voltage at inside-delta circuit relative positive tolerance of the operating voltage at inside-delta circuit operating power for 3-phase motors • at 230 V at 40 °C rated value • at 230 V at inside-delta circuit at 40 °C rated value • at 400 V at 40 °C rated value • at 400 V at 40 °C rated value • at 500 V at 40 °C rated value • at 500 V at inside-delta circuit at 40 °C rated value • at 500 V at inside-delta circuit at 40 °C rated value • at 500 V at inside-delta circuit at 40 °C rated value • at 600 V at 40 °C rated value • at 600 V at 40 °C rated value Operating frequency 1 rated value Operating frequency 2 rated value Operating frequency 2 rated value Folk W Operating frequency 2 rated value Operating frequency 2 rated value Operating frequency 6 the operating frequency relative positive tolerance of the		
relative positive tolerance of the operating voltage relative negative tolerance of the operating voltage at inside-delta circuit relative positive tolerance of the operating voltage at inside-delta circuit operating power for 3-phase motors • at 230 V at 40 °C rated value • at 230 V at thiside-delta circuit at 40 °C rated value • at 400 V at 40 °C rated value • at 400 V at 10 °C rated value • at 500 V at 10 °C rated value • at 500 V at 10 °C rated value • at 500 V at 10 °C rated value • at 600 V at 40 °C rated value Operating frequency 1 rated value Operating frequency 2 rated value Operating frequency 2 rated value Operating frequency 2 rated value Operating frequency 6 the operating frequency relative negative tolerance of the operating frequency relative positive tolerance of the operating frequency at 50 °C after startup • at 50 °C after startup • at 60 °C during startup • at 50 °C during startup • at 50 °C during startup • at 50 °C during startup • at 60 °C during startup		
relative negative tolerance of the operating voltage at inside-delta circuit relative positive tolerance of the operating voltage at inside-delta circuit operating power for 3-phase motors • at 230 V at 40 °C rated value • at 400 V at 40 °C rated value • at 400 V at those-delta circuit at 40 °C rated value • at 400 V at inside-delta circuit at 40 °C rated value • at 500 V at 40 °C rated value • at 500 V at 40 °C rated value • at 500 V at 10 °C rated value • at 600 V at inside-delta circuit at 40 °C rated value • at 600 V at inside-delta circuit at 40 °C rated value • at 600 V at 10 °C rated value • at 600 V at 10 °C rated value • at 600 V at 10 °C rated value Operating frequency 1 rated value Operating frequency 2 rated value Operating frequency 2 rated value or lative positive tolerance of the operating frequency relative positive tolerance of the operating frequency minimum load [%] power loss [W] for rated value of the current at AC • at 40 °C after startup • at 50 °C after startup • at 60 °C after startup • at 60 °C after startup • at 60 °C during startup		
inside-delta circuit relative positive tolerance of the operating voltage at inside-delta circuit operating power for 3-phase motors • at 230 V at 40 °C rated value • at 230 V at inside-delta circuit at 40 °C rated value • at 400 V at 40 °C rated value • at 400 V at 40 °C rated value • at 500 V at 40 °C rated value • at 500 V at 40 °C rated value • at 500 V at 40 °C rated value • at 690 V at 40 °C rated value • at 690 V at 40 °C rated value • at 690 V at 40 °C rated value Operating frequency 1 rated value Operating frequency 1 rated value Operating frequency 2 rated value or lative negative tolerance of the operating frequency relative positive tolerance of the operating frequency minimum load [%] power loss [W] for rated value of the current at AC • at 40 °C after startup • at 50 °C after startup • at 60 °C after startup • at 60 °C during startup		
inside-delta circuit operating power for 3-phase motors • at 230 V at 40 °C rated value • at 230 V at inside-delta circuit at 40 °C rated value • at 400 V at 40 °C rated value • at 400 V at inside-delta circuit at 40 °C rated value • at 500 V at inside-delta circuit at 40 °C rated value • at 500 V at 10 °C rated value • at 690 V at 40 °C rated value • at 690 V at 40 °C rated value • at 690 V at 40 °C rated value Operating frequency 1 rated value Operating frequency 2 rated value Operating frequency 2 rated value or lative negative tolerance of the operating frequency relative negative tolerance of the operating frequency relative positive tolerance of the operating frequency minimum load [%] power loss [W] for rated value of the current at AC • at 40 °C after startup • at 50 °C after startup • at 60 °C after startup out 60 °C after startup at 60 °C during startup • at 60 °C during startup	inside-delta circuit	
 at 230 V at 40 °C rated value at 230 V at inside-delta circuit at 40 °C rated value at 400 V at 40 °C rated value at 400 V at inside-delta circuit at 40 °C rated value at 500 V at 40 °C rated value at 500 V at inside-delta circuit at 40 °C rated value at 500 V at inside-delta circuit at 40 °C rated value at 690 V at inside-delta circuit at 40 °C rated value at 690 V at 40 °C rated value 60 kW Operating frequency 1 rated value 50 Hz Operating frequency 2 rated value 60 Hz relative positive tolerance of the operating frequency relative positive tolerance of the operating frequency minimum load [%] 10 %; Relative to set le at 40 °C after startup at 50 °C after startup at 60 °C after startup at 60 °C during startup at 50 °C during startup at 50 °C during startup at 60 °C during startup	relative positive tolerance of the operating voltage at inside-delta circuit	10 %
 at 230 V at inside-delta circuit at 40 °C rated value at 400 V at 40 °C rated value at 400 V at inside-delta circuit at 40 °C rated value at 500 V at 40 °C rated value at 500 V at 40 °C rated value at 500 V at inside-delta circuit at 40 °C rated value at 500 V at 40 °C rated value at 60 kW at 600 V at 40 °C rated value 160 kW Operating frequency 1 rated value 50 Hz Operating frequency 2 rated value 60 Hz relative negative tolerance of the operating frequency relative positive tolerance of the operating frequency relative positive tolerance of the operating frequency minimum load [%] power loss [W] for rated value of the current at AC at 40 °C after startup at 50 °C after startup at 60 °C after startup at 40 °C during startup at 50 °C during startup at 50 °C during startup at 60 °C during startup at 60		
 at 400 V at 40 °C rated value at 400 V at inside-delta circuit at 40 °C rated value at 500 V at 40 °C rated value at 500 V at inside-delta circuit at 40 °C rated value at 500 V at inside-delta circuit at 40 °C rated value at 690 V at 40 °C rated value 160 kW Operating frequency 1 rated value Operating frequency 2 rated value Operating frequency 2 rated value To Hz Operating frequency 2 rated value Hz W W W W Operating frequency 2 rated value Operating frequency 2 rated value Hz W <li< td=""><td> at 230 V at 40 °C rated value </td><td></td></li<>	 at 230 V at 40 °C rated value 	
 at 400 V at inside-delta circuit at 40 °C rated value at 500 V at 40 °C rated value at 500 V at inside-delta circuit at 40 °C rated value at 690 V at 40 °C rated value 60 kW Operating frequency 1 rated value Operating frequency 2 rated value 60 Hz relative negative tolerance of the operating frequency relative positive tolerance of the operating frequency relative positive tolerance of the operating frequency minimum load [%] 10 %; Relative to set le power loss [W] for rated value of the current at AC at 40 °C after startup at 60 °C after startup at 60 °C after startup at 40 °C during startup at 40 °C during startup at 50 °C during startup at 60 °C during start		
 at 500 V at 40 °C rated value at 500 V at inside-delta circuit at 40 °C rated value at 690 V at 40 °C rated value 160 kW Operating frequency 1 rated value 50 Hz Operating frequency 2 rated value relative negative tolerance of the operating frequency relative positive tolerance of the operating frequency minimum load [%] 10 %; Relative to set le power loss [W] for rated value of the current at AC at 40 °C after startup at 60 °C after startup at 60 °C after startup at 40 °C during startup at 40 °C during startup at 40 °C during startup at 60 °C during		
• at 500 V at inside-delta circuit at 40 °C rated value • at 690 V at 40 °C rated value • at 690 V at 40 °C rated value • at 690 V at 40 °C rated value • at 690 V at 40 °C rated value • at 690 V at 40 °C rated value • at 40 °C rated value • at 40 °C after startup • at 50 °C after startup • at 60 °C after startup • at 40 °C during startup • at 40 °C during startup • at 60 °C during startup		
• at 690 V at 40 °C rated value Operating frequency 1 rated value Operating frequency 2 rated value		
Operating frequency 1 rated value Operating frequency 2 rated value relative negative tolerance of the operating frequency relative positive tolerance of the operating frequency minimum load [%] power loss [W] for rated value of the current at AC • at 40 °C after startup • at 50 °C after startup • at 60 °C after startup • at 40 °C during startup • at 40 °C during startup • at 50 °C during startup • at 50 °C during startup • at 60 °C during startup • at 60 °C during startup • at 60 °C during startup • at 60 °C during startup		
Operating frequency 2 rated value relative negative tolerance of the operating frequency relative positive tolerance of the operating frequency minimum load [%] power loss [W] for rated value of the current at AC • at 40 °C after startup • at 50 °C after startup • at 60 °C after startup • at 40 °C during startup • at 40 °C during startup • at 50 °C during startup • at 60 °C during startup		
relative negative tolerance of the operating frequency relative positive tolerance of the operating frequency minimum load [%] power loss [W] for rated value of the current at AC • at 40 °C after startup • at 50 °C after startup • at 60 °C after startup power loss [W] at AC at current limitation 350 % • at 40 °C during startup • at 50 °C during startup • at 60 °C during startup		
relative positive tolerance of the operating frequency minimum load [%] power loss [W] for rated value of the current at AC • at 40 °C after startup • at 50 °C after startup • at 60 °C after startup power loss [W] at AC at current limitation 350 % • at 40 °C during startup • at 50 °C during startup at 50 °C during startup • at 60 °C during startup		
minimum load [%] power loss [W] for rated value of the current at AC • at 40 °C after startup • at 50 °C after startup • at 60 °C after startup power loss [W] at AC at current limitation 350 % • at 40 °C during startup • at 50 °C during startup • at 50 °C during startup • at 60 °C during startup type of the motor protection Electronic, tripping in the event of thermal overload of the motor Control circuit/ Control type of voltage of the control supply voltage AC		
power loss [W] for rated value of the current at AC • at 40 °C after startup • at 50 °C after startup • at 60 °C after startup power loss [W] at AC at current limitation 350 % • at 40 °C during startup • at 50 °C during startup • at 50 °C during startup • at 60 °C during startup • at 60 °C during startup • at 60 °C during startup type of the motor protection Electronic, tripping in the event of thermal overload of the motor Control circuit/ Control type of voltage of the control supply voltage AC		
 at 40 °C after startup at 50 °C after startup at 60 °C after startup 42 W power loss [W] at AC at current limitation 350 % at 40 °C during startup at 50 °C during startup at 60 °C during startup at 60 °C during startup type of the motor protection Electronic, tripping in the event of thermal overload of the motor Control circuit/ Control type of voltage of the control supply voltage AC		10 70, Holding to out to
 at 50 °C after startup at 60 °C after startup power loss [W] at AC at current limitation 350 % at 40 °C during startup at 50 °C during startup at 60 °C during startup at 60 °C during startup type of the motor protection Electronic, tripping in the event of thermal overload of the motor Control circuit/ Control type of voltage of the control supply voltage AC		51 W
 at 60 °C after startup power loss [W] at AC at current limitation 350 % at 40 °C during startup at 50 °C during startup at 60 °C during startup type of the motor protection Control circuit/ Control type of voltage of the control supply voltage 42 W 2 393 W 1 814 W Electronic, tripping in the event of thermal overload of the motor AC	·	
power loss [W] at AC at current limitation 350 % • at 40 °C during startup • at 50 °C during startup • at 60 °C during startup 1 814 W type of the motor protection Control circuit/ Control type of voltage of the control supply voltage AC		
 at 40 °C during startup at 50 °C during startup at 60 °C during startup type of the motor protection Electronic, tripping in the event of thermal overload of the motor type of voltage of the control supply voltage AC	·	
 at 50 °C during startup at 60 °C during startup type of the motor protection Control circuit/ Control type of voltage of the control supply voltage AC		2 393 W
● at 60 °C during startup type of the motor protection Control circuit/ Control type of voltage of the control supply voltage AC		2 038 W
type of the motor protection Control circuit/ Control type of voltage of the control supply voltage AC		1 814 W
type of voltage of the control supply voltage AC		Electronic, tripping in the event of thermal overload of the motor
	Control circuit/ Control	
	type of voltage of the control supply voltage	AC
	control supply voltage at AC	

● at 50 Hz	110 250 V
● at 60 Hz	110 250 V
relative negative tolerance of the control supply voltage at AC at 50 Hz	-15 %
relative positive tolerance of the control supply voltage at AC at 50 Hz	10 %
relative negative tolerance of the control supply voltage at AC at 60 Hz	-15 %
relative positive tolerance of the control supply voltage at AC at 60 Hz	10 %
control supply voltage frequency	50 60 Hz
relative negative tolerance of the control supply voltage frequency	-10 %
relative positive tolerance of the control supply voltage frequency	10 %
control supply current in standby mode rated value	100 mA
holding current in bypass operation rated value	180 mA
locked-rotor current at close of bypass contact maximum	0.8 A
inrush current peak at application of control supply voltage maximum	43 A
duration of inrush current peak at application of control supply voltage	1.6 ms
design of the overvoltage protection	Varistor
design of short-circuit protection for control circuit	4 A gG fuse (Icu=1 kA), 6 A quick-acting fuse (Icu=1 kA), C1 miniature circuit breaker (Icu= 600 A), C6 miniature circuit breaker (Icu= 300 A); Is not part of scope of supply
Inputs/ Outputs	
number of digital inputs	4
parameterizable	4
number of inputs for thermistor connection	1; Type A PTC or Klixon / Thermoclick
number of digital outputs	4
number of digital outputs parameterizable	3
number of digital outputs not parameterizable	1
digital output version	3 normally-open contacts (NO) / 1 changeover contact (CO)
number of analog outputs	1
switching capacity current of the relay outputs	
at AC-15 at 250 V rated value	3 A
• at DC-13 at 24 V rated value	1 A
Installation/ mounting/ dimensions	
mounting position	Vertical (can be rotated +/- 90° and tilted forward or backward +/- 22.5°)
fastening method	screw fixing
height	306 mm
width	185 mm
depth	203 mm
required spacing with side-by-side mounting	
• forwards	10 mm
backwards	0 mm
• upwards	100 mm
downwards	75 mm
at the side	5 mm
weight without packaging	9.1 kg
Connections/ Terminals	
type of electrical connection	
for main current circuit	busbar connection
for control circuit	screw-type terminals
width of connection bar maximum	25 mm
wire length for thermistor connection	
 with conductor cross-section = 0.5 mm² maximum 	
with conductor cross-section = 0.5 mm² maximum with conductor cross-section = 1.5 mm² maximum	50 m 150 m

• with conductor cross-section = 2.5 mm² maximum	250 m
type of connectable conductor cross-sections	
for DIN cable lug for main contacts stranded	2x (16 95 mm²)
for DIN cable lug for main contacts finely stranded	2x (25 120 mm²)
type of connectable conductor cross-sections	
for control circuit solid	1x (0.5 4.0 mm²), 2x (0.5 2.5 mm²)
for control circuit finely stranded with core end processing.	1x (0.5 2.5 mm²), 2x (0.5 1.5 mm²)
processingat AWG cables for control circuit solid	1x (20 12), 2x (20 14)
wire length	17 (20 12), 27 (20 14)
between soft starter and motor maximum	800 m
at the digital inputs at DC maximum	1 000 m
tightening torque	1 000 111
for main contacts with screw-type terminals	10 14 N·m
for auxiliary and control contacts with screw-type	0.8 1.2 N·m
terminals	0.0 1.2 IV III
tightening torque [lbf·in]	
for main contacts with screw-type terminals	89 124 lbf·in
 for auxiliary and control contacts with screw-type 	7 10.3 lbf·in
terminals	
Ambient conditions	
installation altitude at height above sea level maximum	2 000 m; Derating as of 1000 m, see catalog
ambient temperature	
 during operation 	-25 +60 °C; Please observe derating at temperatures of 40 °C or
	above
during storage and transport	-40 +80 °C
environmental category	
 during operation acc. to IEC 60721 	3K6 (no ice formation, only occasional condensation), 3C3 (no salt mist), 3S2 (sand must not get into the devices), 3M6
• during storage acc. to IEC 60721	1K6 (only occasional condensation), 1C2 (no salt mist), 1S2 (sand must not get inside the devices), 1M4
during transport acc. to IEC 60721	2K2, 2C1, 2S1, 2M2 (max. fall height 0.3 m)
during transport acc. to IEC 60721 EMC emitted interference	2K2, 2C1, 2S1, 2M2 (max. fall height 0.3 m) acc. to IEC 60947-4-2: Class A
EMC emitted interference	
EMC emitted interference Communication/ Protocol	
EMC emitted interference Communication/ Protocol communication module is supported	acc. to IEC 60947-4-2: Class A
EMC emitted interference Communication/ Protocol communication module is supported • PROFINET standard	acc. to IEC 60947-4-2: Class A Yes
EMC emitted interference Communication/ Protocol communication module is supported • PROFINET standard • PROFINET high-feature	acc. to IEC 60947-4-2: Class A Yes Yes
EMC emitted interference Communication/ Protocol communication module is supported • PROFINET standard • PROFINET high-feature • EtherNet/IP	Yes Yes Yes
EMC emitted interference Communication/ Protocol communication module is supported • PROFINET standard • PROFINET high-feature • EtherNet/IP • Modbus RTU	Yes Yes Yes Yes Yes
EMC emitted interference Communication/ Protocol communication module is supported • PROFINET standard • PROFINET high-feature • EtherNet/IP • Modbus RTU • Modbus TCP	Yes Yes Yes Yes Yes Yes Yes
EMC emitted interference Communication/ Protocol communication module is supported • PROFINET standard • PROFINET high-feature • EtherNet/IP • Modbus RTU • Modbus TCP • PROFIBUS	Yes Yes Yes Yes Yes Yes Yes
EMC emitted interference Communication/ Protocol communication module is supported • PROFINET standard • PROFINET high-feature • EtherNet/IP • Modbus RTU • Modbus TCP • PROFIBUS UL/CSA ratings	Yes Yes Yes Yes Yes Yes Yes
EMC emitted interference Communication/ Protocol communication module is supported • PROFINET standard • PROFINET high-feature • EtherNet/IP • Modbus RTU • Modbus TCP • PROFIBUS UL/CSA ratings manufacturer's article number	Yes Yes Yes Yes Yes Yes Yes
EMC emitted interference Communication/ Protocol communication module is supported • PROFINET standard • PROFINET high-feature • EtherNet/IP • Modbus RTU • Modbus TCP • PROFIBUS UL/CSA ratings manufacturer's article number • of circuit breaker — usable for Standard Faults at 460/480 V	Yes
EMC emitted interference Communication/ Protocol communication module is supported • PROFINET standard • PROFINET high-feature • EtherNet/IP • Modbus RTU • Modbus TCP • PROFIBUS UL/CSA ratings manufacturer's article number • of circuit breaker — usable for Standard Faults at 460/480 V according to UL — usable for Standard Faults at 460/480 V at	Yes
EMC emitted interference Communication/ Protocol communication module is supported • PROFINET standard • PROFINET high-feature • EtherNet/IP • Modbus RTU • Modbus TCP • PROFIBUS UL/CSA ratings manufacturer's article number • of circuit breaker — usable for Standard Faults at 460/480 V according to UL — usable for Standard Faults at 460/480 V at inside-delta circuit according to UL — usable for High Faults at 460/480 V at inside-delta circuit according to UL — usable for High Faults at 460/480 V at inside-	Yes
EMC emitted interference Communication/ Protocol communication module is supported • PROFINET standard • PROFINET high-feature • EtherNet/IP • Modbus RTU • Modbus TCP • PROFIBUS UL/CSA ratings manufacturer's article number • of circuit breaker — usable for Standard Faults at 460/480 V according to UL — usable for High Faults at 460/480 V at inside-delta circuit according to UL — usable for High Faults at 460/480 V at inside-delta circuit according to UL — usable for High Faults at 460/480 V at inside-delta circuit according to UL — usable for Standard Faults at 450/480 V at inside-delta circuit according to UL — usable for Standard Faults at 450/480 V at inside-delta circuit according to UL — usable for Standard Faults at 575/600 V	Yes
EMC emitted interference Communication/ Protocol communication module is supported • PROFINET standard • PROFINET high-feature • EtherNet/IP • Modbus RTU • Modbus TCP • PROFIBUS UL/CSA ratings manufacturer's article number • of circuit breaker — usable for Standard Faults at 460/480 V according to UL — usable for High Faults at 460/480 V at inside-delta circuit according to UL — usable for High Faults at 460/480 V at inside-delta circuit according to UL — usable for Standard Faults at 460/480 V at inside-delta circuit according to UL — usable for Standard Faults at 575/600 V according to UL — usable for Standard Faults at 575/600 V at inside-delta circuit according to UL — usable for High Faults at 575/600 V at inside-	Yes
EMC emitted interference Communication/ Protocol communication module is supported • PROFINET standard • PROFINET high-feature • EtherNet/IP • Modbus RTU • Modbus TCP • PROFIBUS UL/CSA ratings manufacturer's article number • of circuit breaker — usable for Standard Faults at 460/480 V according to UL — usable for High Faults at 460/480 V at inside-delta circuit according to UL — usable for High Faults at 460/480 V at inside-delta circuit according to UL — usable for High Faults at 450/480 V at inside-delta circuit according to UL — usable for Standard Faults at 575/600 V according to UL — usable for High Faults at 575/600 V at inside-delta circuit according to UL — usable for Standard Faults at 575/600 V at inside-delta circuit according to UL — usable for Standard Faults at 575/600 V at	Yes
EMC emitted interference Communication/ Protocol communication module is supported • PROFINET standard • PROFINET high-feature • EtherNet/IP • Modbus RTU • Modbus TCP • PROFIBUS UL/CSA ratings manufacturer's article number • of circuit breaker — usable for Standard Faults at 460/480 V according to UL — usable for High Faults at 460/480 V at inside-delta circuit according to UL — usable for High Faults at 460/480 V at inside-delta circuit according to UL — usable for High Faults at 460/480 V at inside-delta circuit according to UL — usable for Standard Faults at 575/600 V according to UL — usable for Standard Faults at 575/600 V at inside-delta circuit according to UL — usable for Standard Faults at 575/600 V at inside-delta circuit according to UL — usable for Standard Faults at 575/600 V at inside-delta circuit according to UL	Yes
EMC emitted interference Communication/ Protocol communication module is supported • PROFINET standard • PROFINET high-feature • EtherNet/IP • Modbus RTU • Modbus TCP • PROFIBUS UL/CSA ratings manufacturer's article number • of circuit breaker — usable for Standard Faults at 460/480 V according to UL — usable for High Faults at 460/480 V at inside-delta circuit according to UL — usable for High Faults at 460/480 V at inside-delta circuit according to UL — usable for High Faults at 450/480 V at inside-delta circuit according to UL — usable for Standard Faults at 575/600 V according to UL — usable for High Faults at 575/600 V at inside-delta circuit according to UL — usable for Standard Faults at 575/600 V at inside-delta circuit according to UL — usable for Standard Faults at 575/600 V at	Yes

- usable for High Faults up to 575/600 V Type: Class J / L, max. 350 A; Iq = 100 kA according to UL - usable for Standard Faults at inside-delta Type: Class RK5 / K5, max. 400 A; Iq = 10 kA circuit up to 575/600 V according to UL - usable for High Faults at inside-delta circuit up Type: Class J / L, max. 350 A; Iq = 100 kA to 575/600 V according to UL operating power [hp] for 3-phase motors • at 200/208 V at 50 °C rated value 50 hp • at 220/230 V at 50 °C rated value 50 hp • at 460/480 V at 50 °C rated value 100 hp • at 575/600 V at 50 °C rated value 150 hp • at 200/208 V at inside-delta circuit at 50 °C rated 75 hp value • at 220/230 V at inside-delta circuit at 50 °C rated 100 hp value • at 460/480 V at inside-delta circuit at 50 °C rated 200 hp value • at 575/600 V at inside-delta circuit at 50 °C rated 250 hp value R300-B300 contact rating of auxiliary contacts according to UL Safety related data protection class IP on the front acc. to IEC 60529 IP00; IP20 with cover touch protection on the front acc. to IEC 60529 finger-safe, for vertical contact from the front with cover acc. to IEC 60947-4-2 electromagnetic compatibility certificate of suitability ATEX Yes IECEx Yes • according to ATEX directive 2014/34/EU **BVS 18 ATEX F 003 X** II (2)G [Ex eb Gb] [Ex db Gb] [Ex pxb Gb], II (2)D [Ex tb Db] [Ex pxb Db], type of protection according to ATEX directive 2014/34/EU I (M2) [Ex db Mb] hardware fault tolerance acc. to IEC 61508 relating to **ATEX** PFDavg with low demand rate acc. to IEC 61508 0.008 relating to ATEX PFHD with high demand rate acc. to EN 62061 relating 0.0000005 1/h to ATEX Safety Integrity Level (SIL) acc. to IEC 61508 relating SIL1 to ATEX T1 value for proof test interval or service life acc. to 3 y IEC 61508 relating to ATEX Certificates/ approvals For use in hazard-**General Product Approval EMC**

ous locations













For use in hazardous locations

Declaration of Conformity

Test Certificates

Marine / Shipping





Type Test Certificates/Test Report







other

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RW5536-6HA16

Cax online generator

 $\underline{\text{http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en\&mlfb=3RW5536-6HA16}}$

 ${\bf Service \& Support~(Manuals,~Certificates,~Characteristics,~FAQs,...)}$

https://support.industry.siemens.com/cs/ww/en/ps/3RW5536-6HA16

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RW5536-6HA16&lang=en


Characteristic: Tripping characteristics, I²t, Let-through current https://support.industry.siemens.com/cs/ww/en/ps/3RW5536-6HA16/char


Characteristic: Installation altitude


http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RW5536-6HA16&objecttype=14&gridview=view1

Simulation Tool for Soft Starters (STS)

https://support.industry.siemens.com/cs/ww/en/view/101494917

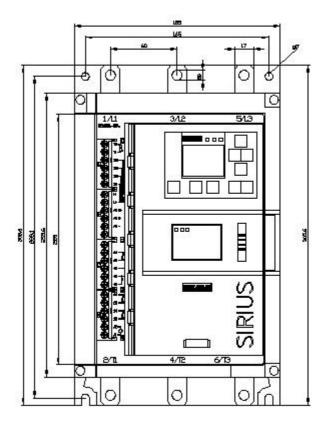

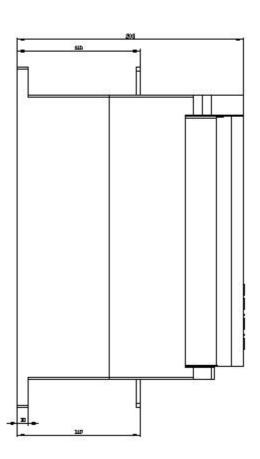

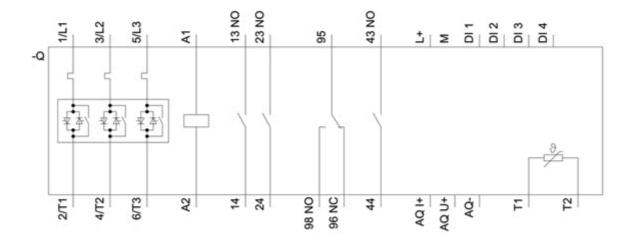

last modified: 3/9/2021 🖸